

# STAR Pro SERIES N-TOPCon 144-cell MODULE

## EG-590NT72-HLV

### 570~590W

0~3% POSITIVE TOLERANCE

### KEY FEATURES



#### SMBB cell design

Super multi Busbar cells bring lower resistance and increased Busbar reflectance ensures higher power output



#### Low degradation

Adopt N-Type TOPCon cell technology, lower degradation and better temperature co-efficiency, greatly increased on generation performance



#### High Reliability

Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified




#### Excellent Low-light Performance

Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments




#### PID Resistant

Excellent PID resistance performance optimized by unique structural design

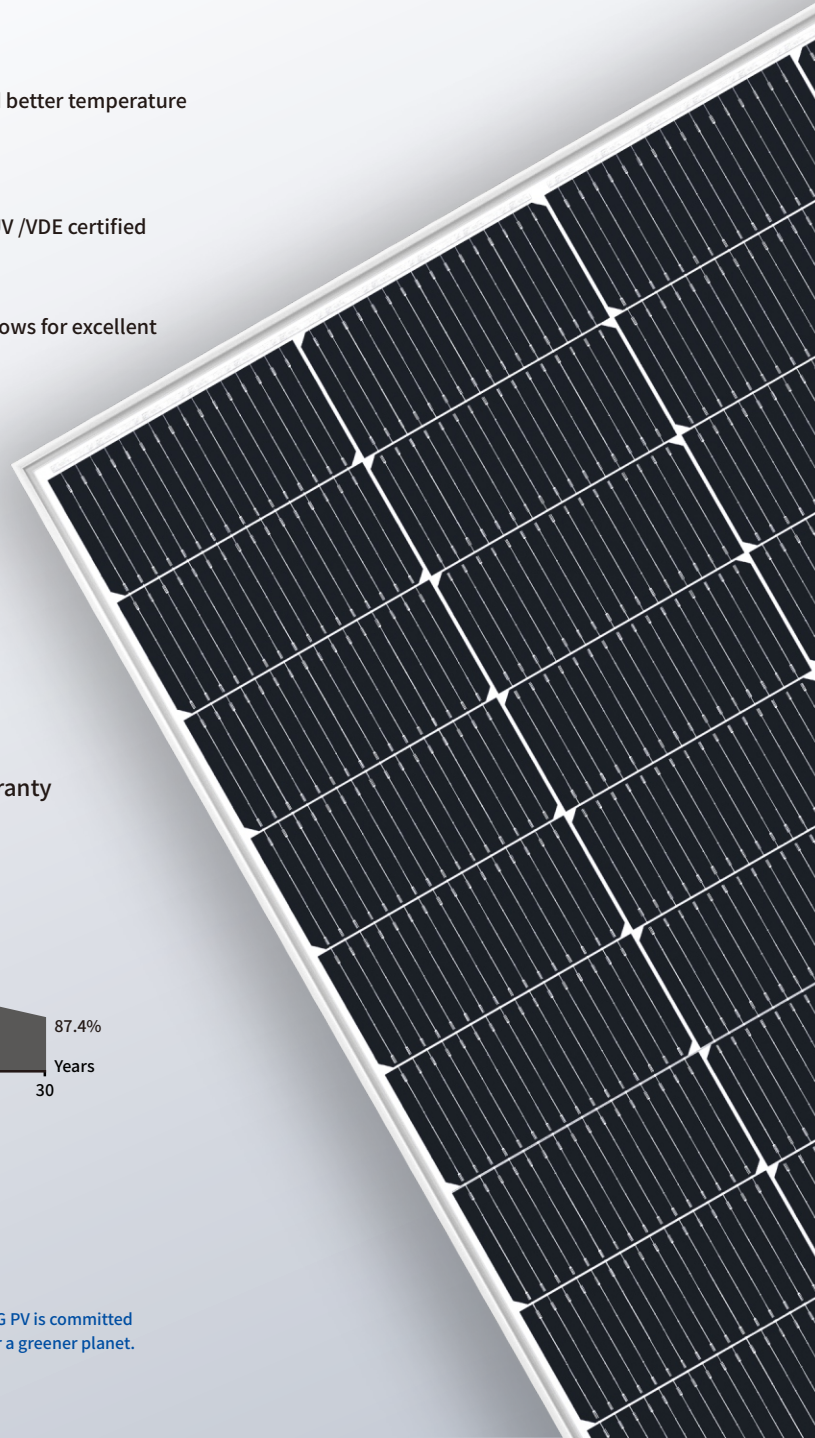

### LINEAR PERFORMANCE WARRANTY


 15 Year Product Warranty  30 Year Linear Power Warranty

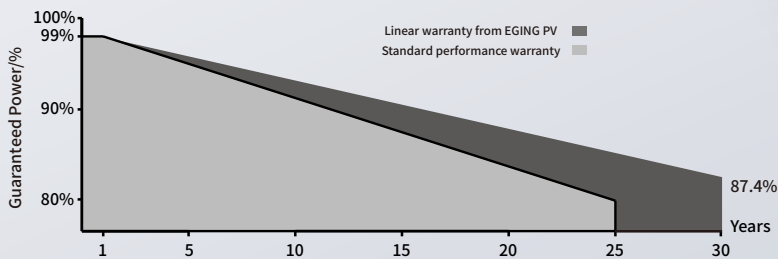


As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

# EG-590NT72-HLV

## Engineering Drawings

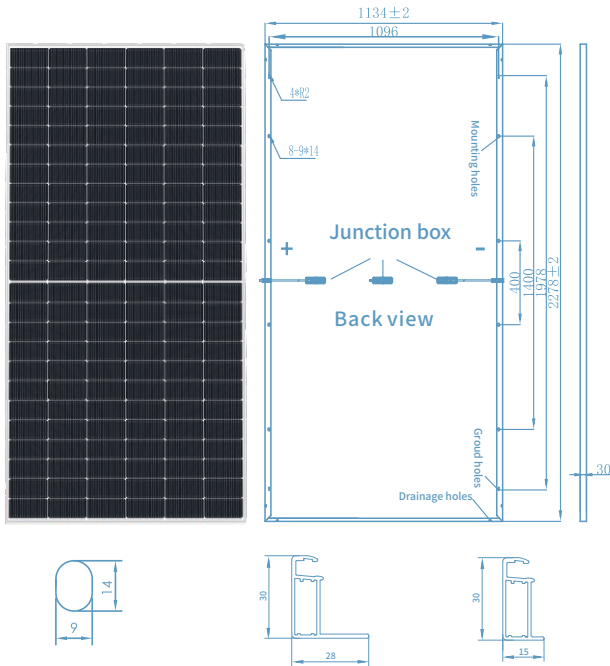

## I-V Curves

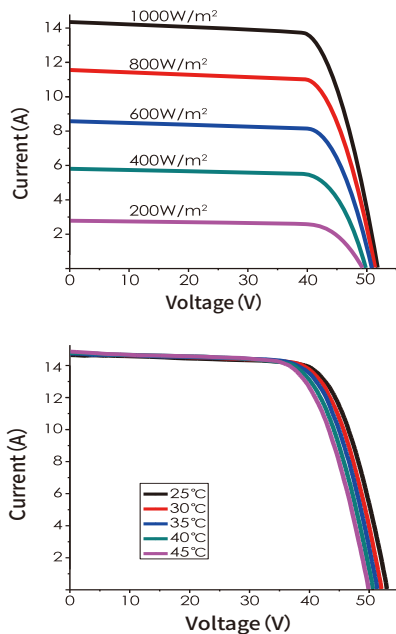

## Packing Configuration

Pieces per pallet	36
Size of packing (mm)	2320*1135*1255
Weight of packing (kg)	1022
Pieces per container	720
Size of container	40' HC

## Electrical Characteristics

Power level	570	575	580	585	590
Pmax (W)	570	575	580	585	590
Vmp (V)	42.17	42.35	42.53	42.71	42.88
Imp (A)	13.52	13.58	13.64	13.70	13.76
Voc (V)	51.00	51.15	51.30	51.45	51.62
Isc (A)	14.31	14.37	14.43	14.49	14.55
Module efficiency (%)	22.1	22.3	22.5	22.7	22.8
Maximum system voltage (V)	1500				
Fuse Rating (A)	25				
Temperature coefficient Pmax (%/°C)	-0.29				
Temperature coefficient Isc (%/°C)	0.046				
Temperature coefficient Voc (%/°C)	-0.24				

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

## Working Characteristics

Power level	570	575	580	585	590
Pmax (W)	429	432	436	441	445
Vmp (V)	39.47	39.49	39.61	39.88	40.06
Imp (A)	10.87	10.94	11.01	11.06	11.11
Voc (V)	48.15	48.28	48.41	48.55	48.70
Isc (A)	11.52	11.59	11.65	11.70	11.75
Power tolerance (%)	0~+3				
NOCT (°C)	44±2				

NOCT: Conditions: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

## Mechanical Characteristics

Number of cells	144pcs
Size of cell (mm)	182*91
Type of cell	N-type Mono
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	2278*1134*30
Weight (kg)	27
Cables/connectors	4mm <sup>2</sup> , MC4 compatible
Length of Cable	Portrait: +300mm/-300mm

## Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(%RH)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s



Tel: 86-519-82585880  
 Zip: 213213  
 Add: No.18, Jinwu Road, Jintan Dist,  
 Changzhou City, Jiangsu Province.  
 Email: marketing@egingpv.com  
 Web: www.egingpv.com

Revised in September 2024 1st Edition\*

CAUTION: All rights and explain reserved by EGING PV.  
 Specifications included in this datasheet are subject to change without notice.  
 The specific content of the product warranty refers to EGING's latest warranty.